


## Shielded 13.56 MHz Desktop Antenna SAT-A26/31-MR-PML-13MHz

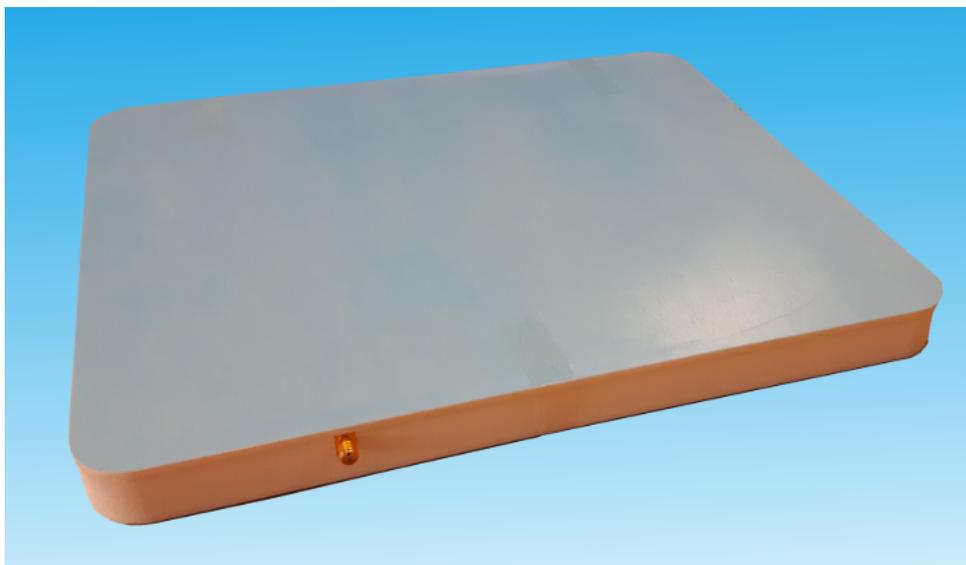

The SAT-A26/31-MR-PML-13MHz is a packaged HF RFID antenna perfectly designed for mid- and long-range applications in industrial environments. The integrated shielding assures that transponders will only be detected inside of the antenna area. Interferences by transponders outside of the antenna or between antennas close by will be minimized.

### Technical Data:

Description:	Antenna with SMA-connector white PVC Material including stainless steel baseplate
Dimensions: (l x w x h )	(260 x 310 x 23) mm
max. HF input power	1.5 W
Operating Temperature	0 - 40°C
Connector	SMA female

### Order Information:

SAT-A26/31-MR-PML-13MHz

Order-No.:400.2026

### Accessories:

Cable-HF- 25cm - BNC female / SMA male	Order-No.:999.0110
Adapter- BNC female / SMA male	Order-No.:999.0139
Cable-HF-2m-SMA-SMA	Order-No.:999.0653
Adapter BNC male / SMA female	Order-No.:999.0146